

MEASURING EQUIPMENT

Accessories

Document No.: 11-801-R0

Sheet: 1 of 1

German Cathodic Protection



Test lead reels - „BIGSPOOL „

Type	Lead length	Cross-section	Colour code
SPOOLB - 50/1.00	500 m	1.0 mm ²	1 - 8
SPOOLB - 10/1.00	1000 m	1.0 mm ²	1 - 8
SPOOLB - 50/1.50	500 m	1.5 mm ²	1
SPOOLB - 10/1.50	1000 m	1.5 mm ²	1
SPOOLB - 50/2.50	500 m	2.5 mm ²	1

Colours : 1 = black, 2 = red, 3 = blue, 4 = yellow, 5 = green, 6 = violet, 7 = brown, 8 = white

Test lead reels - „FASTSPOOL „


Type	Lead length	Cross-section	Colour code
SPOOLF - 25/0.75	25 m	0.75 mm ²	1 - 8
SPOOLF - 25/1.00	25 m	1.0 mm ²	1 - 8
SPOOLF - 50/0.75	50 m	0.75 mm ²	1 - 8
SPOOLF - 50/1.00	50 m	1.0 mm ²	1 - 8
SPOOLF - 10/0.75	100 m	0.75 mm ²	1 - 8
SPOOLF - 10/1.00	100 m	1.0 mm ²	1 - 8

Colours : 1 = black, 2 = red, 3 = blue, 4 = yellow, 5 = green, 6 = violet, 7 = brown, 8 = white


Needle tips

Flexible guide shaft and contact socket for plug 4 mm dia.

Colours : 1 = black, 2 = red

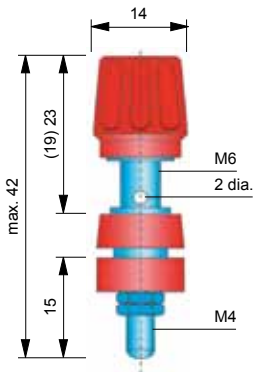

PKI 10

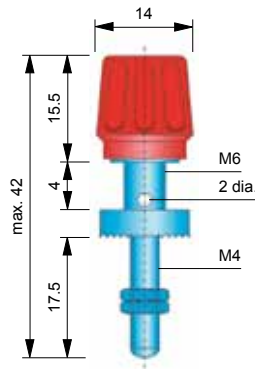

PK 10

Earthing rod for temporary measurements

Rod material: Vanadium steel 50CrV4
Blade tanged right through the handle, chrome-plated, extremely strong

Handle: Hardwood, clear varnished with leather cap

Total length: 390 mm
Rod length: 250 mm
Contact socket: 4 mm dia.



Earthing rod for temporary measurements

Type: D 634 145
Material : Steel, galvanised
Length : 450 mm

